


**AIR / WATER**



**DE-WATERING**

**OIL - FUEL**

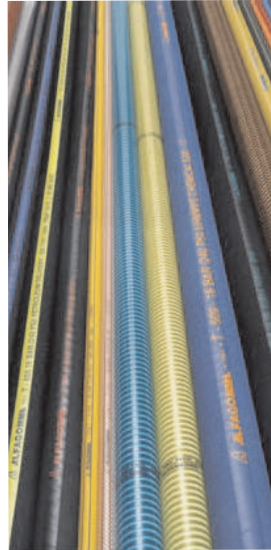

**MINING**

**MATERIAL  
HANDLING**



**CONCRETE  
PUMPING**

# **ALFAGOMMA WRAPPED RUBBER HOSE**

- 148..... 155AA AIR 20 BAR  
151AA AIR 20 BAR HEAVY DUTY  
240AA AIR WATER 20 BAR FRAS**
- 149..... 254AA WATER DELIVERY 10 BAR  
202AA WATER SUCTION/DELIVERY  
220AA CORRUGATED SOFT ENDS  
WATER SUCTION/DELIVERY**
- 150..... 650AA FUEL OIL DELIVERY  
658AA DOMESTIC FUEL REELING  
605AA FUEL OIL SUCTION/DELIVERY**
- 151..... 350AA STEAM HOSE  
350LL STEAM HOSE FOOD GRADE  
330AH SATURATED STEAM HOSE**
- 152..... 5090E CHEMICAL SUCTION/DELIVERY  
702AA AIR SEEDER HOSE**
- 153..... 402LH FOOD SUCTION/DELIVERY  
760LA BULK FOOD DELIVERY  
760AA BULK MATERIAL DELIVERY**
- 154..... 776AA MINERAL SAMPLING HOSE  
753AA SANDBLAST HOSE  
706AA MUFF COUPLING HOSE**
- 155..... 737AA CONCRETE PUMPING 40 BAR  
740AA CONCRETE PUMPING 85 BAR**



All dimensions and weights are nominal and subject to change without notice.



# AIR

## **155AA - AIR HOSE 20 BAR:**



20 Bar Compressed Air Hose for heavy duty applications

**Tube:** SBR/NBR Blend - Oil mist resistant

**Reinforcement:** High tensile textile cords

**Cover:** SBR - Abrasion and ozone resistant

**Temperature:** -30°C to 80°C

Product Code:	I.D (mm)	O.D (mm)	W.P (Psi)	Weight (Kg/m)	Coil Lengths (mt)
AG155AA-020	19.0	29.0	300	0.54	20
AG155AA-025	25.0	35.0	300	0.68	20
AG155AA-032	32.0	44.0	300	1.06	20
AG155AA-038	38.0	50.0	300	1.24	20
AG155AA-050	51.0	65.0	300	1.63	20
AG155AA-063	63.0	79.0	300	2.25	20
AG155AA-075	76.0	92.0	300	2.75	20
AG155AA-100	102.0	118.0	300	3.60	20

## **151AA - AIR HOSE 20 BAR HEAVY DUTY MINING:**



20 Bar Compressed Air Hose for heavy duty mining applications

**Tube:** SBR/NBR Blend - Oil mist resistant

**Reinforcement:** High tensile textile cords

**Cover:** SBR - Abrasion and ozone resistant

**Temperature:** -30°C to 80°C

Product Code:	I.D (mm)	O.D (mm)	W.P (Psi)	Weight (Kg/m)	Coil Lengths (mt)
AG151AA-012	13.0	23.0	300	0.42	20
AG151AA-020	19.0	31.0	300	0.68	20
AG151AA-025	25.0	37.0	300	0.84	20
AG151AA-038	38.0	52.0	300	1.24	20
AG151AA-050	51.0	67.0	300	2.16	20
AG151AA-075	76.0	93.0	300	3.19	20

## **240AA - AIR/WATER 20 BAR FRAS:**



Air, water and stone dust delivery in underground coal mines.

Exceeds AS 2660/B

**Tube:** SBR/NR Black Conductive

**Reinforcement:** High tensile textile cords

**Cover:** SBR - Black Conductive, Abrasion, ozone and fire resistant.

**Temperature:** -30°C to 80°C

Product Code:	I.D (mm)	O.D (mm)	W.P (Psi)	Weight (Kg/m)	Coil Lengths (mt)
AG240AA-012	13.0	23.0	300	0.32	20, 61
AG240AA-020	19.0	31.0	300	0.53	20, 61
AG240AA-025	25.0	37.0	300	0.67	20, 61
AG240AA-032	32.0	46.0	300	1.02	61
AG240AA-038	38.0	52.0	300	1.16	20, 61
AG240AA-050	51.0	67.0	300	1.74	20, 40, 61
AG240AA-063	63.0	80.0	300	2.14	20, 61
AG240AA-075	76.0	93.0	300	2.55	20, 61
AG240AA-100	102.0	119.0	300	3.42	61



# WATER

## **254AA - WATER DELIVERY 10 BAR:**



10 Bar Water delivery in general industrial applications

**Tube:** SBR Rubber


**Reinforcement:** High tensile textile cords

**Cover:** SBR - Abrasion and ozone resistant

**Temperature:** -30°C to 80°C

Product Code:	I.D (mm)	O.D (mm)	W.P (Psi)	Weight (Kg/m)	Coil Lengths (mt)
AG254AA-012	13.0	21.0	150	0.32	20
AG254AA-020	19.0	27.0	150	0.42	20
AG254AA-025	25.0	33.0	150	0.53	20
AG254AA-032	32.0	42.0	150	0.82	20
AG254AA-038	38.0	48.0	150	0.96	20
AG254AA-050	51.0	61.0	150	1.27	20
AG254AA-063	63.0	75.0	150	1.89	20
AG254AA-075	76.0	88.0	150	2.27	20
AG254AA-100	102.0	114.0	150	3.06	20
AG254AA-115	115.0	127.0	150	3.40	20

## **202AA - WATER SUCTION/DELIVERY 10 BAR:**

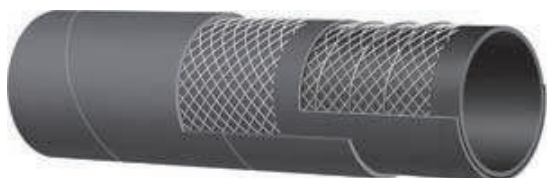

10 Bar Water suction & delivery hose in general industrial and agricultural applications.

**Tube:** EPDM Rubber

**Reinforcement:** High tensile textile cords with embedded wire helix

**Cover:** SBR - Abrasion and ozone resistant

**Temperature:** -30°C to 80°C

Product Code:	I.D (mm)	O.D (mm)	W.P (Psi)	Bend Radius (mm)	Weight (Kg/m)	Coil Lengths (mt)
AG202AA-025	25.0	35.0	150	100	0.68	20
AG202AA-032	32.0	42.0	150	128	0.81	20
AG202AA-038	38.0	48.0	150	152	0.93	20
AG202AA-050	51.0	61.0	150	204	1.22	20
AG202AA-063	63.0	75.0	150	252	1.76	20
AG202AA-075	76.0	88.0	150	304	2.10	20, 30.5
AG202AA-100	102.0	114.0	150	408	2.95	20, 30.5
AG202AA-125	127.0	141.0	150	635	4.67	20
AG202AA-150	152.0	166.0	150	760	5.84	6.1, 20
AG202AA-200	203.0	221.0	150	1015	9.81	6.1, 10

## **220AA - CORRUGATED SOFT ENDS SUCTION & DELIVERY:**



Water/slurry suction and delivery hose. Flexible and light weight construction

**Tube:** Black SBR.

**Reinforcement:** High tensile textile cords with embedded wire helix

**Cover:** Black SBR - Abrasion and ozone resistant

**Temperature:** -30°C to 80°C

Product Code:	I.D (mm)	O.D (mm)	W.P (Psi)	Bend Radius (mm)	Weight (Kg/m)	Coil Lengths (mt)
AG220AA-100	102.0	118.0	75	255	3.02	6
AG220AA-150	152.0	171.0	45	380	6.10	3, 6
AG220AA-200	203.0	223.0	45	510	8.04	3, 6



# FUEL & OIL

## **650AA - FUEL - OIL DELIVERY 10 BAR:**



10 Bar General purpose fuel and oil delivery

**Tube:** NBR - Black Conductive

**Reinforcement:** High tensile textile cords

**Cover:** Black Conductive CR- Abrasion, ozone, hydrocarbon and fire resistant

**Temperature:** -30°C to 80°C

Product Code:	I.D (mm)	O.D (mm)	W.P (Psi)	Weight (Kg/m)	Coil Lengths (mt)
AG650AA-020	19.0	29.0	150	0.47	61
AG650AA-025	25.0	35.0	150	0.58	20, 61
AG650AA-032	32.0	42.0	150	0.71	20, 61
AG650AA-038	38.0	48.0	150	0.83	20, 61
AG650AA-050	51.0	61.0	150	1.10	20, 61
AG650AA-075	76.0	88.0	150	1.96	20, 61
AG650AA-100	102.0	114.0	150	2.66	20, 61

## **658AA - DOMESTIC FUEL REELING 16 BAR:**



Fuel and oil delivery in heavy duty reeling applications. Also suitable for tank cleaning.

**Tube:** NBR - Black Conductive


**Reinforcement:** High tensile textile cords

**Cover:** Black Conductive CR- Abrasion, ozone, hydrocarbon and flame resistant

**Temperature:** -30°C to 70°C

Product Code:	I.D (mm)	O.D (mm)	W.P (Psi)	Weight (Kg/m)	Coil Lengths (mt)
AG658AA-025	25.0	37.0	240	0.81	61
AG658AA-032	32.0	44.0	240	0.97	61
AG658AA-038	38.0	51.0	240	1.13	61
AG658AA-050	51.0	67.0	240	1.66	61

## **605AA - FUEL - OIL SUCTION/DELIVERY 10 BAR:**

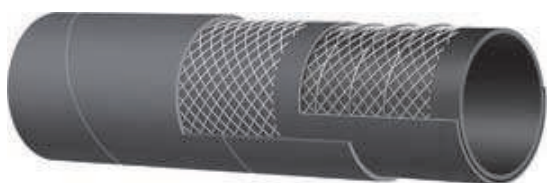

10 Bar Fuel, Oil and Hydraulic fluids suction and delivery hose, specially designed for tank trucks and general industrial applications.

**Tube:** Black Conductive NBR

**Reinforcement:** High tensile textile cords with embedded steel helix wire.

**Cover:** Black CR - Abrasion, ozone and hydrocarbon resistant.

**Temperature:** -30°C to 80°C

Product Code:	I.D (mm)	O.D (mm)	W.P (Psi)	Bend Radius (mm)	Weight (Kg/m)	Coil Lengths (mt)
AG605AA-020	19.0	29.0	150	76	0.60	20, 61
AG605AA-025	25.0	35.0	150	100	0.74	20, 61
AG605AA-032	32.0	42.0	150	128	0.90	20, 61
AG605AA-038	38.0	48.0	150	152	1.03	20, 61
AG605AA-045	45.0	55.0	150	180	1.19	30.5
AG605AA-050	51.0	61.0	150	204	1.33	20, 61
AG605AA-063	63.0	75.0	150	252	2.08	20, 30.5
AG605AA-075	76.0	88.0	150	304	2.48	20, 30.5
AG605AA-090	90.0	104.0	150	360	3.04	30.5
AG605AA-100	102.0	116.0	150	408	3.40	20, 30.5
AG605AA-125	127.0	145.0	150	508	5.78	30.5
AG605AA-150	152.0	170.0	150	608	7.15	30.5
AG605AA-200	203.0	225.0	150	812	11.63	20



# STEAM & HOT WASHDOWN

## **350AA - STEAM 7 BAR - HOT WATER 15 BAR:**



Steam and hot water delivery in general industrial applications.

**Tube:** Black EPDM

**Reinforcement:** High Tensile textile cords

**Cover:** Black EPDM - Heat, abrasion and ozone resistant.

**Temperature:** -40°C to 165°C

Product Code:	I.D (mm)	O.D (mm)	W.P (Psi)	Weight (Kg/m)	Coil Lengths (mt)
AG350AA-020	19.0	31.0	100	0.61	20
AG350AA-025	25.0	37.0	100	0.75	20
AG350AA-038	38.0	52.0	100	1.10	20
AG350AA-050	51.0	67.0	100	1.70	20

## **350LL - STEAM 7 BAR - HOT WATER 15 BAR FOOD GRADE:**



Steam and hot water delivery in general industrial applications, specially designed for wash down use in the food and dairy industries.

**Tube:** White Food Grade EPDM

**Reinforcement:** High Tensile textile cords

**Cover:** White EPDM - Heat, abrasion and ozone resistant.

**Temperature:** -40°C to 165°C

Product Code:	I.D (mm)	O.D (mm)	W.P (Psi)	Weight (Kg/m)	Coil Lengths (mt)
AG350LL-012	13.0	23.0	100	0.39	20, 61
AG350LL-020	19.0	31.0	100	0.65	20, 61
AG350LL-025	25.0	37.0	100	0.80	20, 61

## **330AH - SATURATED STEAM 17 BAR:**



Saturated Steam

**Tube:** Black EPDM

**Reinforcement:** High Tensile Steel cords

**Cover:** Red EPDM - Heat, abrasion and ozone resistant. Pin Pricked

**Temperature:** -40°C to 210°C

Product Code:	I.D (mm)	O.D (mm)	W.P (Psi)	Weight (Kg/m)	Coil Lengths (mt)
AG330AH-012	13.0	25.0	250	0.56	61
AG330AH-020	19.0	32.0	250	0.73	30.5, 61
AG330AH-025	25.0	38.0	250	0.90	61
AG330AH-032	32.0	46.0	250	1.39	61
AG330AH-038	38.0	52.0	250	1.61	61
AG330AH-050	51.0	67.0	250	2.24	61



# CHEMICAL

## **509OE - CHEMICAL SUCTION/DELIVERY 16 BAR:**



Chemical suction and delivery hose, suitable for 98% of existing chemicals.

**Tube:** UHMWPE - FDA

**Reinforcement:** High Tensile textile cords with embedded steel helix wire


**Cover:** Blue EPDM - Abrasion and ozone resistant.

**Temperature:** -20°C to 65°C

Product Code:	I.D (mm)	O.D (mm)	W.P (Psi)	Bend Radius (mm)	Weight (Kg/m)	Coil Lengths (mt)
AG509OE-020	19.0	31.0	240	188	0.59	30.5
AG509OE-025	25.0	37.0	240	225	0.73	30.5
AG509OE-032	32.0	44.0	240	263	0.87	30.5
AG509OE-038	38.0	50.0	240	338	1.01	30.5
AG509OE-050	51.0	63.0	240	413	1.33	30.5
AG509OE-063	63.0	77.0	240	450	2.08	30.5
AG509OE-075	76.0	92.0	240	525	2.82	30.5
AG509OE-100	102.0	118.0	240	675	3.85	30.5

# AIR SEEDER

## **702AA - AIR SEEDER 10 BAR:**

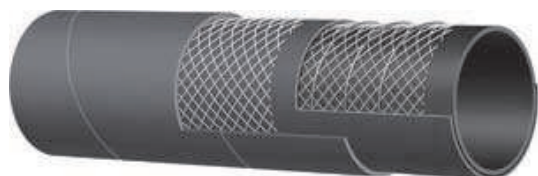

Agricultural seed transfer on Air Flo seeding equipment.

**Tube:** Black Conductive NR - Abrasion Resistant

**Reinforcement:** High Tensile textile cords with embedded steel helix wire

**Cover:** Black NBR/PVC Blend - Oil, Heat, Abrasion and Ozone resistant.

**Temperature:** -30°C to 80°C

Product Code:	I.D (mm)	O.D (mm)	W.P (Psi)	Bend Radius (mm)	Weight (Kg/m)	Coil Lengths (mt)
AG702AA-032	32.0	42.0	150	128	0.74	20
AG702AA-038	38.0	48.0	150	152	1.00	20
AG702AA-045	45.0	55.0	150	180	1.16	20
AG702AA-050	51.0	61.0	150	204	1.30	20
AG702AA-063	63.0	75.0	150	252	2.02	20
AG702AA-075	76.0	88.0	150	304	2.41	20



# FOOD GRADE

## 402LH - FOOD SUCTION/DELIVERY 10 BAR:



Suction and delivery of Liquid food and alcoholic beverages. Max 50% proof. Special construction for maximum flexibility.

**Tube:** White NR

**Reinforcement:** High Tensile textile cords with embedded steel helix wire

**Cover:** Red SBR/EPDM Blend - Abrasion and ozone resistant.

**Temperature:** -30°C to 80°C

Product Code:	I.D (mm)	O.D (mm)	W.P (Psi)	Bend Radius (mm)	Weight (Kg/m)	Coil Lengths (mt)
AG402LH-025	25.0	37.0	150	75	0.90	20
AG402LH-038	38.0	50.0	150	114	1.22	20
AG402LH-050	51.0	63.0	150	153	1.58	20
AG402LH-075	76.0	88.0	150	228	2.48	20

## 760LA - BULK FOOD DELIVERY 5 BAR:



Bulk food and materials delivery, specially designed for grains, flours and plastic pellets transfer.

**Tube:** White NR - Abrasion resistant.

**Reinforcement:** High Tensile synthetic cords with antistatic wire

**Cover:** Black Conductive SBR/NR blend, abrasion and ozone resistant.

**Temperature:** -30°C to 80°C

Product Code:	I.D (mm)	O.D (mm)	W.P (Psi)	Weight (Kg/m)	Coil Lengths (mt)
AG760LA-100	102.0	118.0	75	2.78	20

# MATERIAL HANDLING

## 760AA - BULK MATERIAL DELIVERY 5 BAR:



Bulk material delivery, specially designed for dry cement, grain and animal feed transfer.

**Tube:** Black Conductive NR - Abrasion resistant.

**Reinforcement:** High Tensile textile cords

**Cover:** Black Conductive SBR/NR blend, abrasion and ozone resistant.

**Temperature:** -30°C to 80°C

Product Code:	I.D (mm)	O.D (mm)	W.P (Psi)	Weight (Kg/m)	Coil Lengths (mt)
AG760AA-075	75.0	93.0	75	2.38	20
AG760AA-100	102.0	120.0	75	3.19	20





# MATERIAL HANDLING

## 776AA - MINERAL SAMPLING HOSE 35 BAR:



Mineral recovery in sampling operations.

**Tube:** Black conductive NR - Abrasion resistant

**Reinforcement:** High Tensile textile cords with embedded steel helix wire

**Cover:** Black conductive SBR/NR - abrasion and ozone resistant.

**Temperature:** -30°C to 80°C

Product Code:	I.D (mm)	O.D (mm)	W.P (Psi)	Bend Radius (mm)	Weight (Kg/m)	Coil Lengths (mt)
AG776AA-050	51.0	77.0	525	204	3.07	20
AG776AA-075	76.0	106.0	525	304	5.00	20, 61
AG776AA-100	102.0	134.0	525	408	7.29	20

## 753AA - SANDBLAST 10 & 20 BAR:



Sandblast, designed for long service life in heavy duty applications.

**Tube:** Black conductive NR

**Reinforcement:** High Tensile textile cords

**Cover:** Black conductive SBR/NR - Abrasion and ozone resistant. Pin Pricked

**Temperature:** -30°C to 80°C

Product Code:	I.D (mm)	O.D (mm)	W.P (Psi)	Weight (Kg/m)	Coil Lengths (mt)
AG753AA-1327	13.0	27.0	150	0.51	20
AG753AA-2033	19.0	33.0	150	0.65	20
AG753AA-2040	19.0	40.0	150	1.04	20
AG753AA-2540	25.0	40.0	150	0.80	20
AG753AA-2548	25.0	48.0	300	1.41	20
AG753AA-3248	32.0	48.0	150	1.15	20
AG753AA-3255	32.0	55.0	300	1.69	20
AG753AA-3855	38.0	55.0	150	1.51	20
AG753AA-3864	38.0	64.0	300	2.33	20
AG753AA-5176	51.0	76.0	300	2.68	20

## 706AA - MUFF COUPLING HOSE 10 BAR:



Bulk material and abrasives slurries suction and delivery. Designed for Muff coupling use.

**Tube:** Black conductive NR - Abrasion resistant

**Reinforcement:** High Tensile textile cords with embedded steel helix wire

**Cover:** Black conductive SBR/NR - Abrasion and ozone resistant.

**Temperature:** -30°C to 80°C

Product Code:	I.D (mm)	O.D (mm)	W.P (Psi)	Bend Radius (mm)	Weight (Kg/m)	Coil Lengths (mt)
AG706AA-075	76.0	102.0	150	304	4.77	20
AG706AA-100	102.0	128.0	150	408	6.31	20
AG706AA-150	152.0	184.0	150	760	11.42	20
AG706AA-200	203.0	235.0	150	1015	15.48	6.1, 10
AG706AA-250	254.0	286.0	150	1270	21.60	6.1, 10
AG706AA-300	300.0	344.0	150	1500	34.49	6.1, 10



# MATERIAL HANDLING

## **737AA - CONCRETE PUMPING 40 BAR:**



Concrete Pumping

**Tube:** Black conductive NR - abrasion resistant

**Reinforcement:** High Tensile textile cords

**Cover:** Black conductive SBR/NR - Abrasion and ozone resistant.

**Temperature:** -30°C to 80°C

Product Code:	I.D (mm)	O.D (mm)	W.P (Psi)	Weight (Kg/m)	Coil Lengths (mt)
AG737AA-050	51.0	69.0	600	1.85	20
AG737AA-075	76.0	104.0	600	4.41	20
AG737AA-090	90.0	118.0	600	5.17	20
AG737AA-100	102.0	130.0	600	5.85	20

**NOTE:** Concrete Hose assemblies also available, please contact sales staff.

## **740AA - CONCRETE PUMPING 85 BAR:**



High pressure concrete pumping

**Tube:** Black conductive NR - abrasion resistant

**Reinforcement:** High Tensile steel cords

**Cover:** Black conductive SBR/NR - Abrasion and ozone resistant.

**Temperature:** -30°C to 80°C

Product Code:	I.D (mm)	O.D (mm)	W.P (Psi)	Bend Radius (mm)	Weight (Kg/m)	Coil Lengths (mt)
AG740AA-050	51.0	69.0	1275	255	2.16	20, 61
AG740AA-063	63.0	85.0	1275	265	3.38	20, 61
AG740AA-075	76.0	100.0	1275	380	4.59	20
AG740AA-090	90.0	116.0	1275	450	5.93	20, 30.5
AG740AA-100	102.0	128.0	1275	510	7.51	20, 30.5
AG740AA-125	127.0	155.0	1275	635	10.94	30.5

**NOTE:** Concrete Hose assemblies also available, please contact sales staff.

