


MULTI PURPOSE



AIR

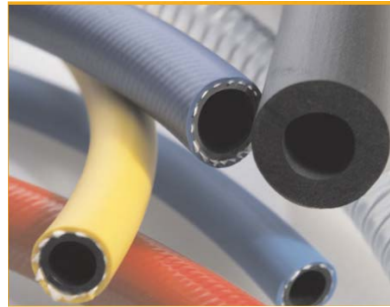

WATER



WELDING



FUEL



AUTOMOTIVE

GOODYEAR EXTRUDED RUBBER HOSE

**184.... ORTAC
WINGFOOT**



**185.... RED HORIZON
BLACK HORIZON
YELLOW HORIZON**



**186.... GORILLA
FIRE ENGINE BOOSTER
NR SPRAY**



**187.... SPECTRA
FORTRESS 300
NEPTUNE 3000**

**188.... CAR HEATER HOSE (SAE30R3)
FUEL HOSE (SAEJ30R7)
AIR BRAKE (9003-SAEJ1402)**



**189.... FLEXSTEEL
INSTAGRIP**



**190.... BLUE OR RED WELDING HOSE
TWINLINE WELDING
TWINLINE WELDING FITTED
ASSEMBLIES**



All dimensions and weights are nominal and subject to change without notice.



ORTAC:



Ortac is Goodyear's most popular premium quality multipurpose hose for industrial applications. It is found in demanding applications in factories, construction, agriculture, quarries, mines, railroads, the oil and gas industry, and shipbuilding. Non-conductive.

Tube: Chemigum® RMA Class A (High Oil Resistance)
Reinforcement: Spiral synthetic yarn.
Cover: Red Carbryn® RMA Class A (High Oil Resistance)

Temperature: -29°C to 100°C

Product Code	I.D (mm)	O.D (mm)	W.P (Psi)	Weight (Kg/m)	Reel Length (mt)
E50-005	4.8	11.8	300	0.10	152.4
E50-006	6.4	13.5	250	0.13	152.4
E50-008	7.9	17.5	250	0.21	152.4
E50-010	9.5	17.5	250	0.22	152.4
E50-012	12.7	21.3	250	0.30	152.4
E50-016	15.9	26.9	300	0.52	152.4
E50-020	19.1	29.0	250	0.51	152.4
E50-025	25.4	38.1	300	0.88	137.2
E50-032	31.8	45.2	250	1.04	122
E50-038	38.1	52.8	250	1.43	91.4
E50-050	50.8	63.5	200	1.61	61

WINGFOOT:



A good quality, economical, general purpose hose for industrial air service, compressor lines, pneumatic tools, low pressure spray, and many other applications where the need for oil resistance is moderate. Non conductive.

Tube: Chemigum®, RMA Class A (High Oil Resistance)
Reinforcement: Spiral synthetic yarn
Cover: Blue, Black or Red Chemivic®, RMA Class B (Medium-High Oil Resistance)

Temperature: -29°C to 100°C.

Product Code	I.D (mm)	O.D (mm)	W.P (Psi)	Weight (Kg/m)	Reel Length (mt)
E51-006	6.4	13.5	200	0.15	152.4
E51-008	7.9	16.0	200	0.21	152.4
E51-010	9.5	17.5	200	0.22	152.4
E51-012	12.7	21.3	200	0.31	152.4
E51-016	15.9	25.4	200	0.40	152.4
E51-020	19.1	28.7	200	0.57	152.4
E51-025	25.4	38.1	300	0.92	137.2
E51-032	31.8	45.6	250	1.25	122
E51-038	38.1	53.2	250	1.55	91.4



RED HORIZON:



An economical air and water hose, Horizon is for a wide range of industrial, construction and agricultural applications.

Tube: Versigard® ; synthetic rubber RMA Class C (Limited Oil Resistance)

Reinforcement: Spiral synthetic yarn.

Cover: Red Versigard® synthetic rubber

Temperature: -40°C to 88°C.

Product Code	I.D (mm)	O.D (mm)	W.P (Psi)	Weight (Kg/m)	Reel Length (mt)
E52-006	6.4	12.7	200	0.13	152.4
E52-008	7.9	14.7	200	0.18	152.4
E52-010	9.5	17.0	200	0.22	152.4
E52-012	12.7	20.6	200	0.30	152.4
E52-016	15.9	24.6	200	0.40	152.4
E52-020	19.1	28.5	200	0.51	152.4
E52-025	25.4	36.8	200	0.80	137.2

BLACK HORIZON:



An economical air and water hose, Horizon is for a wide range of industrial, construction and agricultural applications.

Tube: Versigard® ; synthetic rubber RMA Class C (Limited Oil Resistance)

Reinforcement: Spiral synthetic yarn.

Cover: Black Versigard® synthetic rubber

Temperature: -40°C to 88°C.

Product Code	I.D (mm)	O.D (mm)	W.P (Psi)	Weight (Kg/m)	Reel Length (mt)
E53-006	6.4	12.7	200	0.13	152.4
E53-008	7.9	14.7	200	0.18	152.4
E53-010	9.5	17.0	200	0.22	152.4
E53-012	12.7	20.6	200	0.30	152.4
E53-020	19.1	28.5	200	0.51	152.4
E53-025	25.4	36.8	300	0.80	137.2

YELLOW HORIZON:



An economical air and water hose, Horizon is for a wide range of industrial, construction and agricultural applications.

Tube: Versigard® ; synthetic rubber, RMA Class C (Limited Oil Resistance)

Reinforcement: Spiral synthetic yarn.

Cover: Yellow Versigard® synthetic rubber

Temperature: -40°C to 88°C.

Product Code	I.D (mm)	O.D (mm)	W.P (Psi)	Weight (Kg/m)	Reel Length (mt)
E54-012	12.7	21.3	250	0.33	152.4
E54-020	19.1	29.0	250	0.52	152.4
E54-025	25.4	36.8	200	0.54	137.2



GORILLA:



GoDzilla hose is a premium quality, multipurpose industrial hose with a wide range of applications in factories, construction, agriculture, quarries, mines, railroads, the oil and gas industry, and shipbuilding. All sizes are rated at 500 psi (3.4 MPa) maximum working pressure. Non conductive.

Tube: Nitrile Synthetic Rubber, RMA Class A (High Oil Resistance)
Reinforcement: Spiral Flexten® yarn,
Cover: Yellow Carbyn®, RMA Class A (High Oil Resistance) MSHA approved
Temperature: -29°C to 88°C

Product Code	I.D (mm)	O.D (mm)	W.P (Psi)	Weight (Kg/m)	Reel Length (mt)
E55-006	6.4	15.5	500	0.25	152.4
E55-010	9.5	18.6	500	0.33	152.4
E55-012	12.7	22.6	500	0.42	152.4
E55-020	19.1	30.2	500	0.61	152.4
E55-025	25.4	37.8	500	0.86	137.2

FIRE ENGINE BOOSTER:



For use in high pressure fire engine booster service. Also has many applications in other heavy duty industrial and municipal operations.

Tube: Synthetic rubber
Reinforcement: Braided (2) synthetic yarn
Cover: Red synthetic rubber
Temperature: -18°C to 82°C

Product Code	I.D (mm)	O.D (mm)	W.P (Psi)	Weight (Kg/m)	Reel Length (mt)
E56-020	19.1	31.8	800	0.62	61
E56-025	25.4	38.9	800	0.81	61

NR SPRAY:



NR Spray is a premium quality all purpose hose for handling a variety of applications such as paint spray or agricultural spray. Will handle spraying paints, automotive finish paints, laquers, thinners, turpentine, air, oil and a large variety of solvents and chemicals.

Tube: Nylon, Silicone-Free
Reinforcement: Braided synthetic yarn
Cover: Black synthetic rubber (RMA Class B: Medium-High Oil Resistance)
Temperature: -18°C to 88°C

Product Code	I.D (mm)	O.D (mm)	W.P (Psi)	Weight (Kg/m)	Reel Length (mt)
E57-006	6.4	12.4	750	0.12	152.4
E57-010	9.5	17.8	750	0.22	152.4
E57-012	12.7	22.1	750	0.33	152.4
E57-020	19.1	30.2	750	0.54	152.4
E57-025	25.4	38.4	750	0.80	137.2



SPECTRA:



Spectra Washdown hose is a high quality, economical construction for hot water up to 200°F (93°C) cleanup service in food processing plants, dairies, packing houses, bottling plants, breweries, canneries, and creameries.

Tube: Black Nitrile Synthetic Rubber, RMA Class A (High Oil Resistance), Non-FDA

Reinforcement: Spiral synthetic yarn

Cover: White Chemivic®, RMA Class A (High Oil Resistance),

Temperature: -29°C to 93°C

Product Code	I.D (mm)	O.D (mm)	W.P (Psi)	Weight (Kg/m)	Reel Length (mt)
E58-012	12.7	23.1	300	0.40	152.4
E58-020	19.1	30.0	300	0.60	152.4
E58-025	25.4	38.1	275	0.89	137.2

FORTRESS 300 WITH MICROBAN PROTECTION:



A high quality construction for hot water up to 93°, cleanup service in food processing plants, dairies, packing houses, bottling plants, breweries, canneries and creameries. Its super abrasion and oil resistant cover provides maximum protection against the adverse affects of oil and animal fats. The cover of our Fortress 300 incorporates Microban's antimicrobial built in protection.

Tube: Black Nitrile Synthetic Rubber

Reinforcement: Spiral synthetic braid..

Cover: Yellow Carbryn synthetic rubber, RMA Class A (High Oil Resistance) with Microban product protection.

Temperature: -29 to 93°C

Product Code	I.D (mm)	O.D (mm)	W.P (Psi)	Weight (Kg/m)	Reel Length (mt)
E78-012	12.7	22.8	300	0.43	152.4
E78-016	15.9	27.0	300	0.54	152.4
E78-020	19.1	30.2	300	0.61	152.4
E78-025	25.4	38.1	300	0.89	137.2

NEPTUNE 3000:



For use on pressure washer machines with working pressure up to 3000 psi.

Tube: Nitrile synthetic rubber

Reinforcement: One braid steel wire

Cover: Blue oil resistant synthetic rubber, RMA Class B

Temperature: -29°C to 121°C .

Product Code	I.D (mm)	O.D (mm)	W.P (Psi)	Weight (Kg/m)	Reel Length (mt)
E60-006	6.4	13.5	3000	0.22	152.4
E60-010	9.5	17.5	3000	0.36	152.4
E60-012	12.7	20.8	3000	0.48	152.4



CAR HEATER HOSE (SAE30R3):



Produced with a tough versigard tube and cover to resist heat, ozone and anti-freeze present in today's automobiles. Meets SAE30R3 requirements for burst pressure and temperature requirements.

- Tube:** Black versigard
- Reinforcement:** Synthetic textile
- Cover:** Black versigard
- Temperature:** Up to 121oC

Product Code	I.D (mm)	O.D (mm)	W.P (Psi)	Weight (Kg/m)	Reel Length (mt)
E61-012	12.7	19.6	60	0.24	152.4
E61-016	15.8	23.1	60	0.32	152.4
E61-019	19.5	26.7	50	0.38	152.4

FUEL HOSE (SAEJ30R7):



Especially for later model vehicle applications, with high under the bonnet temperatures. The hysunite hose cover is oil and petrol resistant and withstands exposure to fuel, vapor, moisture and heat up to 125°C. The chemigum rubber tube is specially compounded to resist petrol, oil, diesel and other fuels.

- Tube:** Chemigum (Black)
- Reinforcement:** Synthetic Textile
- Cover:** Hysunite (Black)
- Temperature:** -40°C to 125°C

Product Code	I.D (mm)	O.D (mm)	W.P (Psi)	Weight (Kg/m)	Reel Length (mt)
E62-005	4.7	10.3	50	0.10	152.4
E62-006	6.4	12.7	50	0.14	152.4
E62-008	7.9	14.3	50	0.18	152.4
E62-010	9.5	15.9	50	0.19	152.4
E62-012	12.7	19.8	35	0.26	152.4
E62-016	15.9	23.8	35	0.36	152.4
E62-020	19.5	28.2	35	0.50	152.4

****WARNING**** Do not use for pressure line on fuel injected engines.

AIR BRAKE (9003-SAEJ1402):



Designed for compressed air brake systems on trucks and buses. Meets or exceeds the requirements of SAEJ1402A and DOT FMVSS-106

- Tube:** Black seamless, oil and heat resistant rubber.
- Reinforcement:** Spiral of synthetic cord.
- Cover:** Black seamless, heat, oil and weather resistant synthetic rubber.
- Temperature:** -40°C to 100°C

Product Code	I.D (mm)	O.D (mm)	W.P (Psi)	Weight (Kg/m)	Reel Length (mt)
E63-010	9.5	19.3	225	0.27	152.4
E63-012	12.7	22.1	225	0.32	152.4
E63-020	19.5	30.2	200	0.54	152.4



FLEXSTEEL:



Flexsteel Petrol Pump hose is a premium hardwall hose which offers the ultimate in kink resistance, low volumetric expansion, service life and reliability. Meeting the performance criteria of AS2683-1989 Type 4, Grade 2, kind 1 & 2 and BS3395-1989 Type 3. It's single braid of high tensile wire reinforcing, coupled with Goodyear's specially developed compounds, make this the safest and most durable hose available. Is also UL 330 & ULC approved.

- Tube:** Black Chemigum Nitrile rubber
- Reinforcement:** Single braided high tensile wire
- Cover:** Chemivic® Nitrile Blend rubber.
- Temperature:** Petrol dispensing at Ambient temperatures

Product Code	I.D (mm)	O.D (mm)	W.P (Psi)	Weight (Kg/m)	Reel Length (mt)
E64-016**	15.8	26.1	36*	0.64	Random
E64-020**	19.5	31.7	36*	0.68	Random
E64-025**	25.4	35.3	36*	0.78	Random

*Applications other than petrol dispensing, hose is capable of working pressure of 250psi

** Crimped hose assemblies with male and female BSP thread also available.

INSTAGRIP:



For use with push-on fittings at working pressures of 300 psi. For low pressure hydraulic and pneumatic systems such as shop air systems, general industrial, maintenance and automotive applications. Nonconductive, minimum electrical resistance, greater than one megohm per inch of hose length at 1000 Volts DC. MSHA approved cover


- Tube:** Silicone not used in the manufacturing of this hose. Chemivic oil and heat resistant, RMA Class A (High Oil Resistance)
- Reinforcement:** Braided (1) high strength synthetic yarn laid at the most effective angle for maximum strength and coupling holding ability
- Cover:** Black, Blue, Gray (others - contact marketing) oil, weather and abrasion resistant synthetic rubber. RMA Class B (Medium Oil Resistance)
- Temperature:** -40°C to 88°C

Product Code	I.D (mm)	O.D (mm)	W.P (Psi)	Weight (Kg/m)	Reel Length (mt)
E67-006	6.35	13.8	300	0.13	152.4
E67-010	9.53	17.4	300	0.21	152.4
E67-012	12.7	20.6	300	0.24	152.4

Blue - E68 Prefix
Grey - E69 Prefix



BLUE OR RED WELDING:



Goodyear's premium welding hose meets all the requirements of AS1335 and is used in portable and in-line gas welding service in construction, shipbuilding, metalworking and manufacturing industries. The Blue (Oxygen) and Red (Acetylene) hoses have a specially manufactured flame retardant cover as required in AS1335.

Tube: Versiguard (Black)

Reinforcement: Spiraled Synthetic textile

Cover: Versigard, Blue or Red (EPDM) with flame retardant cover.

Temperature: -29°C to 82°C

Product Code	I.D (mm)	O.D (mm)	W.P (Psi)	Weight (Kg/m)	Reel Length (mt)
E71-005	5.0	12.2	175	0.10	152.4
E71-006	6.0	14.0	175	0.22	152.4
E71-008	8.0	16.0	175	0.25	152.4
E71-010	9.5	19.0	175	0.31	152.4

Red - E72 Prefix

TWINLINE WELDING:



Goodyear's premium welding hose meets all the requirements of AS1335 and is used in portable and in-line gas welding service in construction, shipbuilding, metalworking and manufacturing industries. The Blue (Oxygen) and Red (Acetylene) hoses have a specially manufactured flame retardant cover as required in AS1335..

Tube: Versiguard (Black)

Reinforcement: Synthetic textile

Cover: Oxygen Line - Versigard (Blue)

Acetylene Line - Versigard (Red)

Product Code	I.D (mm)	O.D (mm)	W.P (Psi)	Weight (Kg/m)	Reel Length (mt)
E75-005	5.0	12.2	175	0.32	152.4

TWINLINE WELDING FITTED ASSEMBLIES:



Fitted Oxy/Acc welding hose with crimped on fittings, ready to use. Available in lengths of 5mtr, 7.5mtr and 10mtr.

Product Code	I.D. (mm)	W.P. (Psi)	Length (mt)
ASS-E75-005-005	5.0	175	5
ASS-E75-005-007	5.0	175	7.5
ASS-E75-005-010	5.0	175	10



