

DE WATERING



FIRE



MINING



PUMPING



AGRICULTURE



PVC LAYFLAT

**226... LOW PRESSURE BLUE
HIGH PRESSURE RED**

**227... CENTURION FIRE HOSE
BORELINER HOSE**



All dimensions and weights are nominal and subject to change.



SUNNY HOSE LAYFLAT

LOW PRESSURE
BLUE:



Product Code	I.D. (mm)	O.D. (mm)	W.P (Psi)	B.P (Psi)	Weight (Kg/m)	Coil Length (mt)
C01-025	26.0	29.0	100	294	0.17	100
C01-032	33.0	36.0	100	294	0.20	100
C01-038	41.0	43.0	75	219	0.21	100
C01-050	53.0	56.0	65	195	0.29	100
C01-063	66.0	69.0	60	174	0.40	100
C01-075	78.0	81.0	60	174	0.57	100
C01-100	104.0	108.0	60	174	0.75	100
C01-125	128.0	131.7	45	126	1.00	100
C01-150	155.0	159.0	45	132	1.25	100
C01-200	207.0	212.0	45	132	1.93	100
C01-250	257.0	262.0	30	108	2.70	100
C01-300	308.0	313.0	30	90	2.90	100
C01-350	359.0	364.4	28	84	3.65	100
C01-400	410.0	415.4	28	84	4.29	100


Color: Blue

Working Temp: -0°C to 60°C

Features: Lightweight, and available in large diameters, this synthetic fibre and soft PVC hose is constructed in a one piece method. Resists most chemical agents.

Applications: Ideal for use as a drainage hose in emergency flood disaster situations. Also suitable for drainage of locations with relatively small differences in elevation, for temporary water supply or drainage. Resistance to chemical agents also makes it useful as an irrigation hose for small farms, delivering some types of liquid fertilisers and agricultural chemicals.

HIGH PRESSURE
RED:

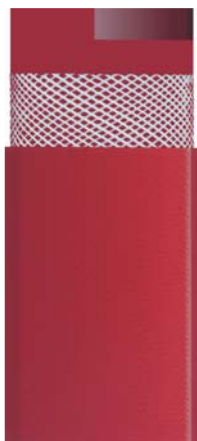

Product Code	I.D. (mm)	O.D. (mm)	W.P (Psi)	B.P (Psi)	Weight (Kg/m)	Coil Length (mt)
C03-038	40.0	44.0	152	456	0.30	100
C03-050	53.0	57.0	152	456	0.42	100
C03-063	66.0	70.0	152	456	0.55	100
C03-075	79.0	83.0	130	390	0.66	100
C03-100	104.0	109.0	130	390	1.02	100
C03-150	155.0	161.0	102	306	1.65	100
C03-200	207.0	213.0	75	225	2.20	100
C03-250	257.0	263.0	65	195	2.90	100

Color: Brick Red.


Working Temp: -0°C to 60°C

Features: Tough, excellent abrasion resistance, heavy wall PVC with synthetic fibre reinforcement.

Applications: Well suited for water drainage at open pit mining and at civil engineering / dam construction sites in mountains or any other application where water has to be moved to a significantly higher or lower elevation.



FIRE HOSE



CENTURION:

Outer Cover: White Polyester yarn

Inner Tube: Synthetic polymer

Applications: Hose Suitable for fire fighting and washdown use.

Product Code	I.D (mm)	W.P (Psi)	Weight (Kg/m)	Coil Length (mt)
C10-025	25.0	218	0.11	30
C10-038	38.0	218	0.17	30
C10-050	50.0	218	0.22	30
C10-063	64.0	218	0.31	30
C10-075	76.0	218	0.37	30
C10-100	102.0	218	0.45	30

BORELINE

BORELINE HOSE:

Color: Blue

Working Temp: 0°C to 45°C

Features: High tensile strength. High pressure rated, easy to roll and transport. Lightweight and corrosion resistant. Boreline is made from the most advanced abrasive resistant thermoplastic which has elastic properties that allow it to increase flow rates under pressure. It comes with an innovative cable strap attachment which takes up minimal space and does not affect the rolling of the hose.

Applications: Boreline has been developed specifically for the rugged Australian environment as an alternative to steel risers which are prone to corrosion as well as being difficult to install, maintain and retrieve.

By wearing a high tensile 'fire hose' jacket and reinforcing it with polyurathene a hose is produced that is both super strong and flexible.

Boreline is designed to handle the weight of the pump and water column under extreme conditions.



Product Code	I.D (mm)	Wall thickness (mm)	W.P (Psi)	Burst Pressure (Psi)	Weight (Kg/mt)	Peak Tensile Load (t)	Coil Length (mt)
C20-050	51.0	3.3	435	1073	0.60	3.2	200
C20-075	76.0	3.5	333	841.2	0.90	8.3	200
C20-100	102.0	3.5	304	727.2	1.50	10.0	200
C20-150	152.0	4.0	261	638.2	2.50	16.0	100

STAINLESS STEEL COUPLINGS:

Product Code	Size (mm)
C21-050	50.0
C21-075	76.0
C21-100	102.0
C21-150	154.0

STRAPS:

Product Code	Size (mm)
C22-050	50.0
C22-075	76.0
C22-100	102.0
C22-150	154.0

